


# GPRS-T1

## GPRS/SMS REPORTING TRANSMITTER

The **GPRS-T1** communication module is used to provide GPRS monitoring and text messaging functions via control panels equipped with a phone dialler provided by any manufacturer.

- telephone line monitoring conversion to GPRS/SMS transmission, compatible with any panel
- automatic fallback to SMS reporting in case of GPRS failure
- SMS/CLIP personal messaging
- support for CLIP test transmissions
- communication failure indication

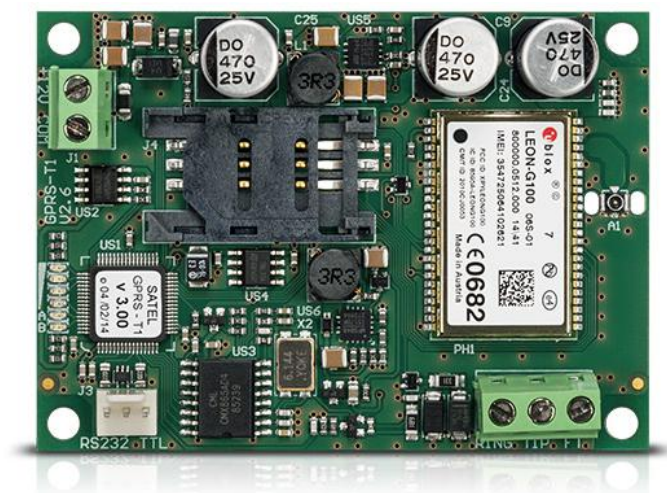

## TECHNICAL DATA

Environmental class	II
Max. current consumption	220 mA
Weight	184 g
Current capacity of the FT output	50 mA
Standby mode current consumption	50 mA
Board dimensions	80 x 57 mm
Operating temperature range	-10...+55 °C
Nominal supply voltage (±15%)	12 V DC



The actual appearance of the products may differ from the presented images. Product descriptions are provided in the web service for information purposes only.